

DS7830

Dual Differential Line Driver

General Description


The DS7830 is a dual differential line driver that also performs the dual four-input NAND or dual four-input AND function.

TTL (Transistor-Transistor-Logic) multiple emitter inputs allow this line driver to interface with standard TTL systems. The differential outputs are balanced and are designed to drive long lengths of coaxial cable, strip line, or twisted pair transmission lines with characteristic impedances of 50Ω to 500Ω . The differential feature of the output eliminates troublesome ground-loop errors normally associated with single-wire transmissions.

Features

- Single 5V power supply
- Diode protected outputs for termination of positive and negative voltage transients
- Diode protected inputs to prevent line ringing
- High speed
- Short circuit protection

Connection Diagram

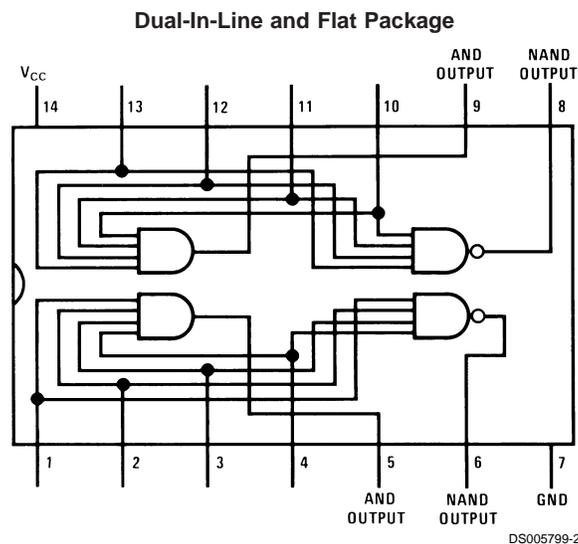

Top View

For Complete Military 883 Specifications, See RETS Data Sheet.
 Order Number DS7830J/883 or DS7830W/883
 See NS Package Number J14A

Absolute Maximum Ratings (Note 2)

Cavity Package

1308 mW

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|--|-----------------|
| V_{CC} | 7.0V |
| Input Voltage | 5.5V |
| Storage Temperature | -65°C to +150°C |
| Lead Temperature (Soldering, 4 sec.) | 260°C |
| Output Short Circuit Duration (125°C) | 1 second |
| Maximum Power Dissipation (Note 1) at 25°C | |

Operating Conditions

| | Min | Max | Units |
|-----------------------------|-----|------|-------|
| Supply Voltage (V_{CC}) | | | |
| DS7830 | 4.5 | 5.5 | V |
| Temperature (T_A) | | | |
| DS7830 | -55 | +125 | °C |

Note 1: Derate cavity package 8.7 mW/°C above 25°C; derate molded package 9.7 mW/°C above 25°C.

Electrical Characteristics (Notes 3, 4)

| Symbol | Parameter | Conditions | Min | Typ | Max | Units | |
|----------|------------------------------|--|----------------------------|------|------|---------------|---|
| V_{IH} | Logical "1" Input Voltage | | 2.0 | | | V | |
| V_{IL} | Logical "0" Input Voltage | | | | 0.8 | V | |
| V_{OH} | Logical "1" Output Voltage | $V_{IN} = 0.8V$ | $I_{OUT} = -0.8\text{ mA}$ | 2.4 | | V | |
| | | | $I_{OUT} = 40\text{ mA}$ | 1.8 | 3.3 | V | |
| V_{OL} | Logical "0" Output Voltage | $V_{IN} = 2.0V$ | $I_{OUT} = 32\text{ mA}$ | | 0.2 | 0.4 | V |
| | | | $I_{OUT} = 40\text{ mA}$ | | 0.22 | 0.5 | V |
| I_{IH} | Logical "1" Input Current | $V_{IN} = 2.4V$ | | | 120 | μA | |
| | | $V_{IN} = 5.5V$ | | | 2 | mA | |
| I_{IL} | Logical "0" Input Current | $V_{IN} = 0.4V$ | | | -4.8 | mA | |
| I_{SC} | Output Short Circuit Current | $V_{CC} = 5.0V$, $T_A = 125^\circ\text{C}$, (Note 5) | -40 | -100 | -120 | mA | |
| I_{CC} | Supply Current | $V_{IN} = 5.0V$, (Each Driver) | | 11 | 18 | mA | |
| V_I | Input Clamp | $V_{CC} = \text{Min}$, $I_{IN} = -12\text{ mA}$ | | -1.0 | -1.5 | V | |

Switching Characteristics

$T_A = 25^\circ\text{C}$, $V_{CC} = 5V$, unless otherwise noted

| Symbol | Parameter | Conditions | Min | Typ | Max | Units |
|-----------|-----------------------------|--|-----|-----|-----|-------|
| t_{pd1} | Propagation Delay AND Gate | $R_L = 400\Omega$, $C_L = 15\text{ pF}$ (Figure 1) | | 8 | 12 | ns |
| | | | | 11 | 18 | ns |
| t_{pd0} | Propagation Delay NAND Gate | $R_L = 400\Omega$, $C_L = 15\text{ pF}$ (Figure 1) | | 8 | 12 | ns |
| | | | | 5 | 8 | ns |
| t_1 | Differential Delay | Load, 100 Ω and 5000 pF, (Figure 2) | | 12 | 16 | ns |
| t_2 | Differential Delay | Load, 100 Ω and 5000 pF, (Figure 2) | | 12 | 16 | ns |


Note 2: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

Note 3: Unless otherwise specified min/max limits apply across the -55°C to +125°C temperature range for the DS7830. Typical values are for $T_A = 25^\circ\text{C}$ and $V_{CC} = 5.0V$.


Note 4: All currents into device pins shown as positive, out of device pins as negative, all voltages referenced to ground unless otherwise noted. All values shown as max or min on absolute value basis.

Note 5: Only one output at a time should be shorted.

AC Test Circuit and Switching Time Waveforms

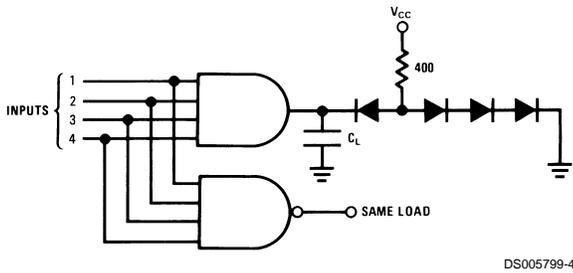


DS005799-4

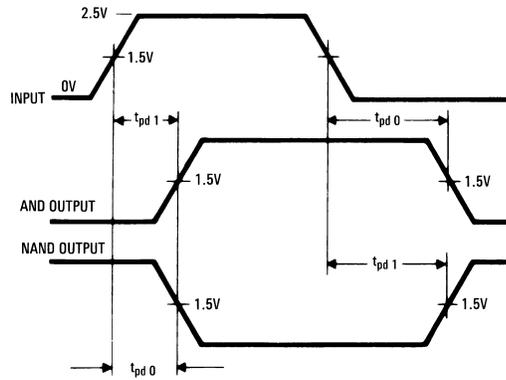


DS005799-9

f = 1 MHz
 $t_r = t_f \leq 10$ ns (10% to 90%)
 Duty cycle = 50%

FIGURE 1.

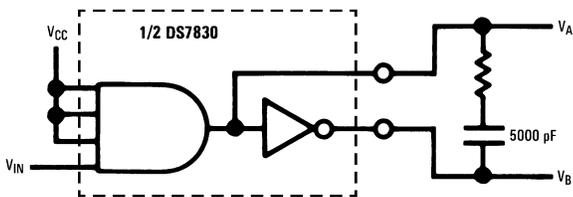

DS005799-8

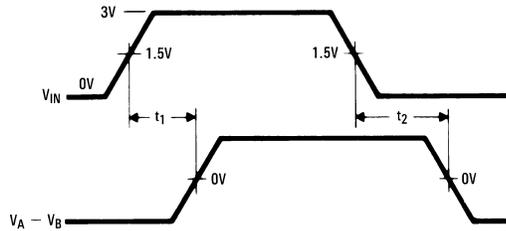


DS005799-10

FIGURE 2.


Typical Performance Characteristics

Output High Voltage (Logical "1") vs Output Current

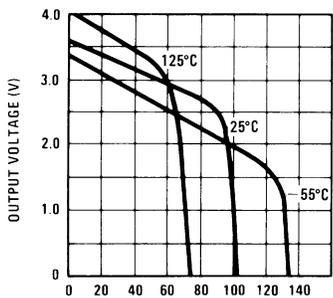


DS005799-7

Differential Delay vs Temperature

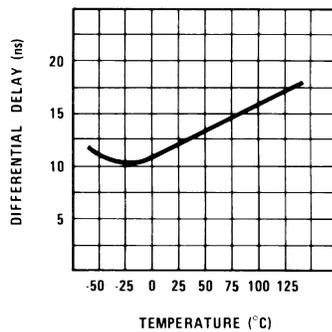

DS005799-11


Threshold Voltage vs Temperature

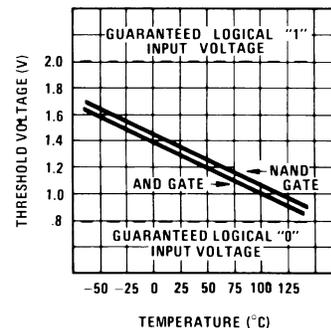

DS005799-12


Typical Performance Characteristics (Continued)

Differential Output Voltage ($|V_{AND} - V_{NAND}|$) vs Differential Output Current

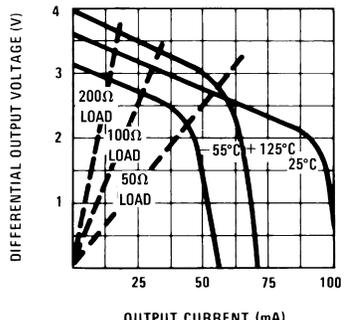


DS005799-13

Power Dissipation (No Load) vs Data Input Frequency

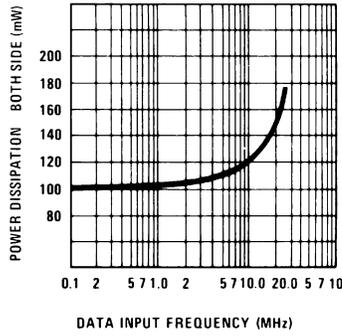

DS005799-14


Output Low Voltage (Logical "0") vs Output Current

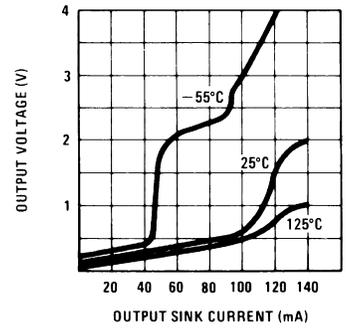

DS005799-15

Typical Application


Digital Data Transmission

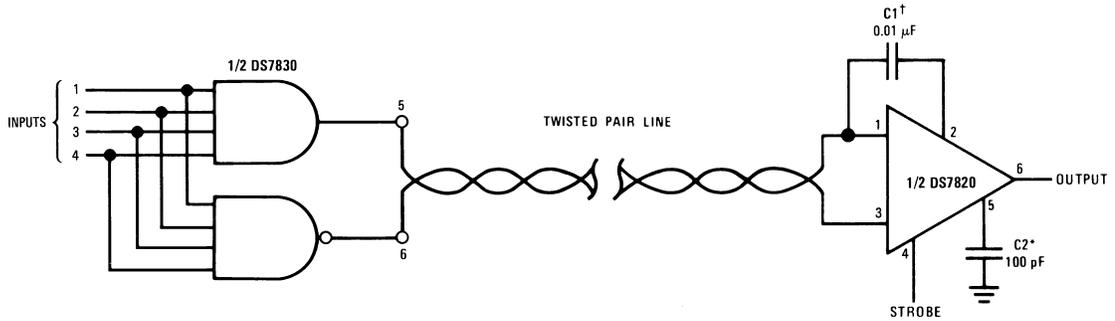

DS005799-3

†Exact value depends on line length.
*Optional to control response time.

Schematic Diagram

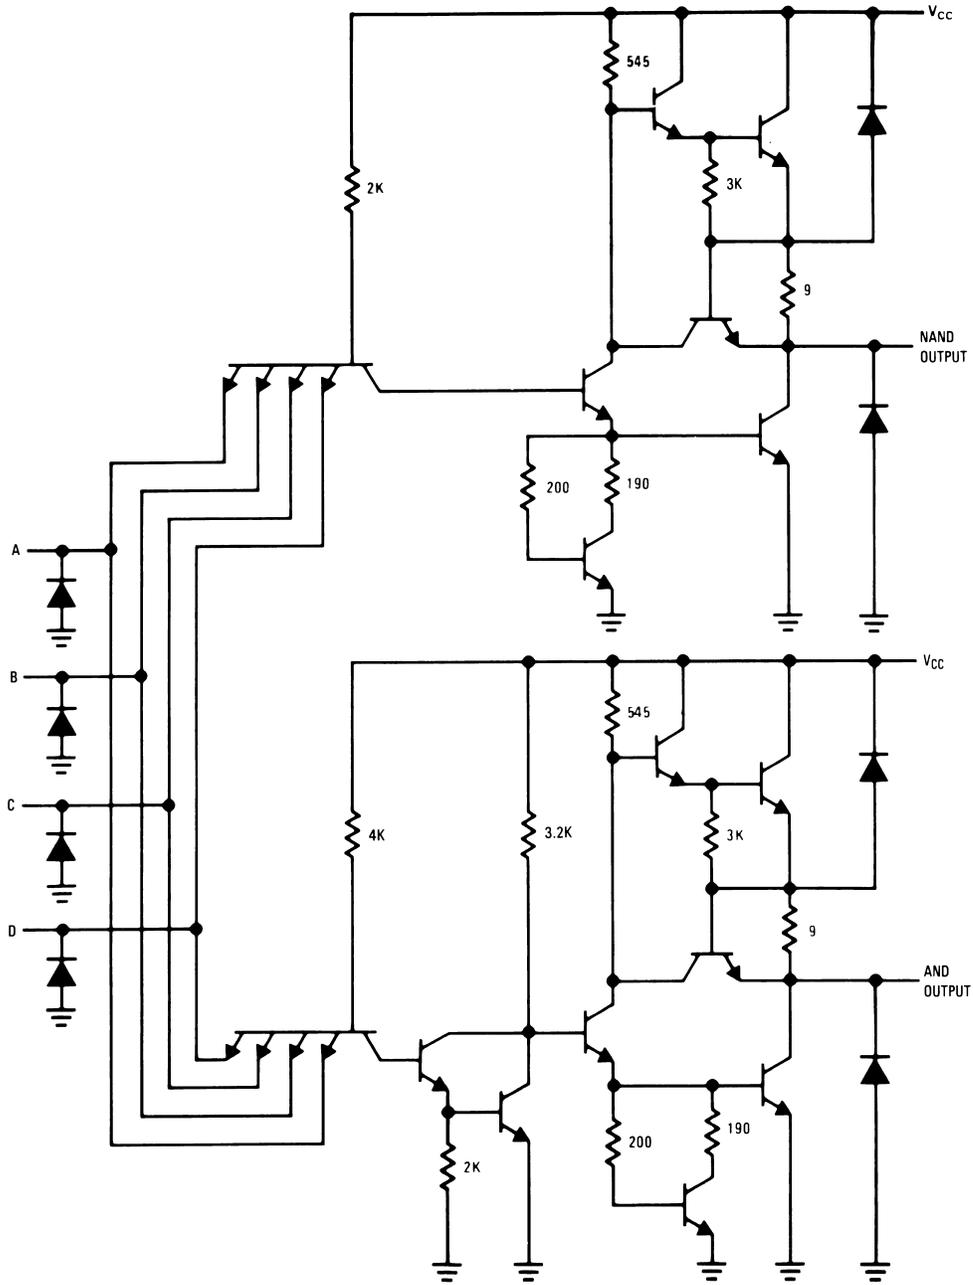

DS005799-1

*2 Per Package

